

## PFM710

---

### VGA Extender



### Features

- Power supply: No need additional power supply.
- Transmission effect: Real-time transmission video without compression, no delay, strong anti-interference.
- Transmission distance: VGA video signal high fidelity transmission 75M (max)
- Main functions: Use single UTP (CAT-5E and CAT-6) transmit 1-ch video, lower cost.
- Protection and anti-interference: Excellent anti-thunder, anti-static and anti-interference capabilities.
- Appearance structure: No need to install driver program and set network parameters, easy to use and convenient to install.


# PFM710

## Specifications


<b>Model</b>	<b>PFM710</b>
<b>Properties</b>	
Transmission Signal	1 channel
Transmission Distance	75M(max)
<b>Video Transmission Properties</b>	
Video Signal Input Interface	Female 15, VGA port
Video Input Interface	Female 15, VGA port
Twisted-pair Video Transmission Port	RJ45 port
Video Signal Processing Bandwidth	<120MHz(-3db)
Synchronous Signal Bandwidth	1k-200kHz
<b>Adjustment</b>	
Transmitter	2 modes
Receiver	3 modes
<b>Protection</b>	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per: IEC61000-4-2 1995(GB/T 17626.5)
Anti-thunder	1KV
	Per: IEC61000-4-5 1995(GB/T 17626.5)
<b>Stability</b>	
MTBF	>5000H
<b>Physical Properties</b>	
Dimension(L*W*H)	Transmitter: 85mm×64mm×28 mm (port length included) Receiver: 85mm×64mm×28 mm
Shell	Aluminum
Color	Black
N.W.	Transmitter: 111g Receiver: 110g
<b>Environmental</b>	
Working Temperature	0-55℃
Storage Temperature	-20~80℃
Humidity	0~95%(non-condensing)

# PFM710

## Dimensions (mm)

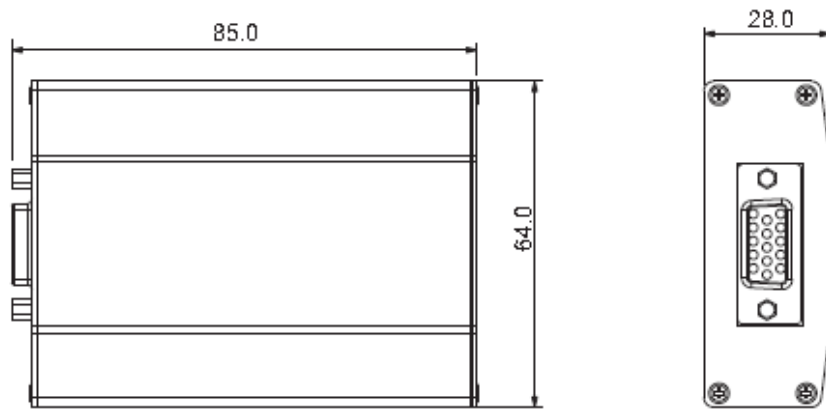

## Application

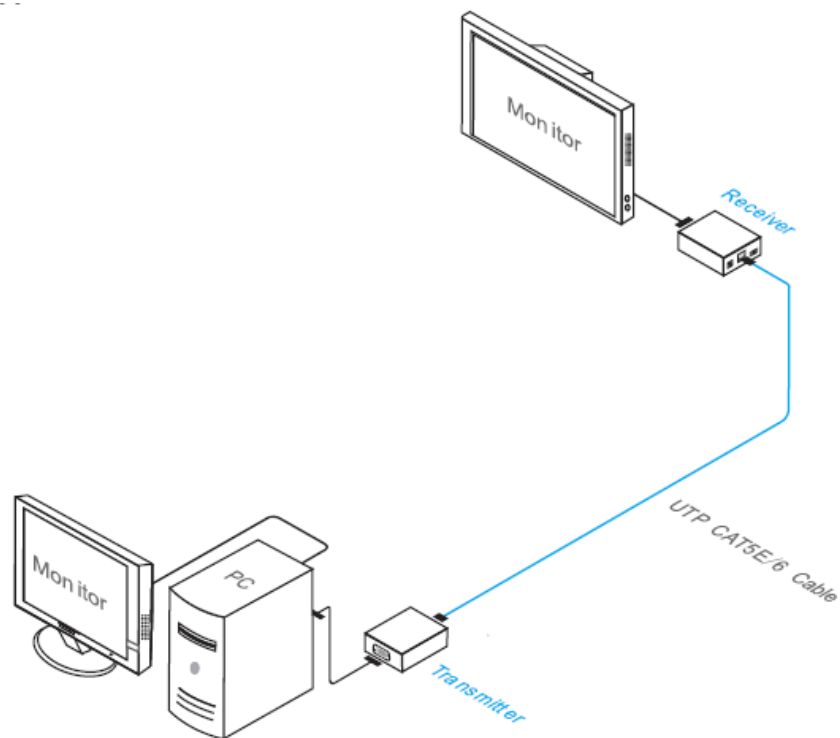

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2013Dahua Technology Co., Ltd.