


# DH-PFS3102-1T

## 1-Port Ethernet Switch (Unmanaged)

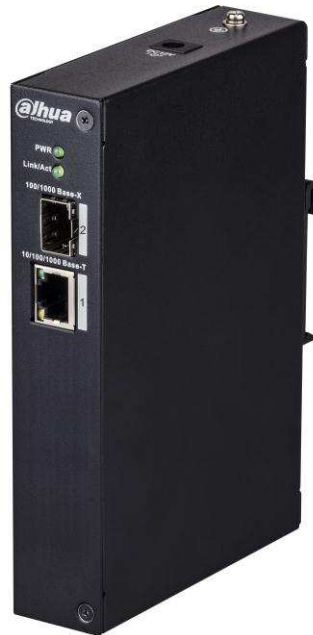

### Features

- > 2-layer industrial level Ethernet media converter
- > Conform IEEE802.3, IEEE802.3u, IEEE802.3ab/z and IEEE802.3X standards
- > 100M/1000M self-adaptive SFP fiber port
- > Industrial wide temperature design

### Technical Specifications

Model	DH-PFS3102-1T
Ethernet port	1*100/1000 Base-X、 1*10/100/1000 Base-T、
Switching Capacity	6.8G
Packet Forwarding Rate	2.98Mpps
Packet Buffer Memory	1Mb
MAC Table Size	8K
Exchange Mode	Store & forward
Application Humidity	10%—90%
Power	DC 12V

## DH-PFS3102-1T

Power Consumption	≤3W
Lightning Protection	Common Mode 4KV Differential Mode 2KV
Working Temperature	- 40°C ~ 70°C
Weight	420g
Dimension(W×D×H)	150mm×100mm×30mm

### Accessories

Model	
PFT3900	155M 850nm,2km,LC, Multi-mode
PFT3950	1.25G 850nm,500m,LC, Multi-mode
PFT3910	155M 1310/1550nm,20km,LC, Single-mode
PFT3920	155M 1550/1310nm,20km,LC, Single-mode
PFT3960	1.25G 1310/1550nm,20km,LC, Single-mode
PFT3970	1.25G 1550/1310nm,20km,LC, Single-mode

---

#### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.