

DS-KAW50-1 Power Supply

Available Model

DS-KAW50-1

Features

- Short Circuit protection, over load protection, and over power voltage protection
- Natural air cooling
- LED power indicator
- 105° C long life electrolytic capacitor
- 5 seconds 300VAC surge voltage input tolerance
- Working Temperature: 70 °C
- Passes 5G vibration test




Specifications

Parameter	Model	DS-KAW50-1
Input voltage		100 VAC to 240 VAC
Output voltage		12 VDC
Output current		4.17 A
Output power		50 W
Noise and ripple		< 150 mVpp @ 25 °C
Voltage adjustment range		11 VDC to 14 VDC
Cooling system		Convection
Working temperature		Operating: -10 °C to +70 °C (14 °F to 158 °F) Storage: -25 °C to +85 °C (-13 °F to 185 °F)
Working humidity		< 95% (No Condensation)
Dimension (L x W x D)		246 mm × 266.4 mm × 79.6 mm (9.69" × 10.49" × 3.13")
Weight		1.68 kg (3.70 lb)



Dimensions

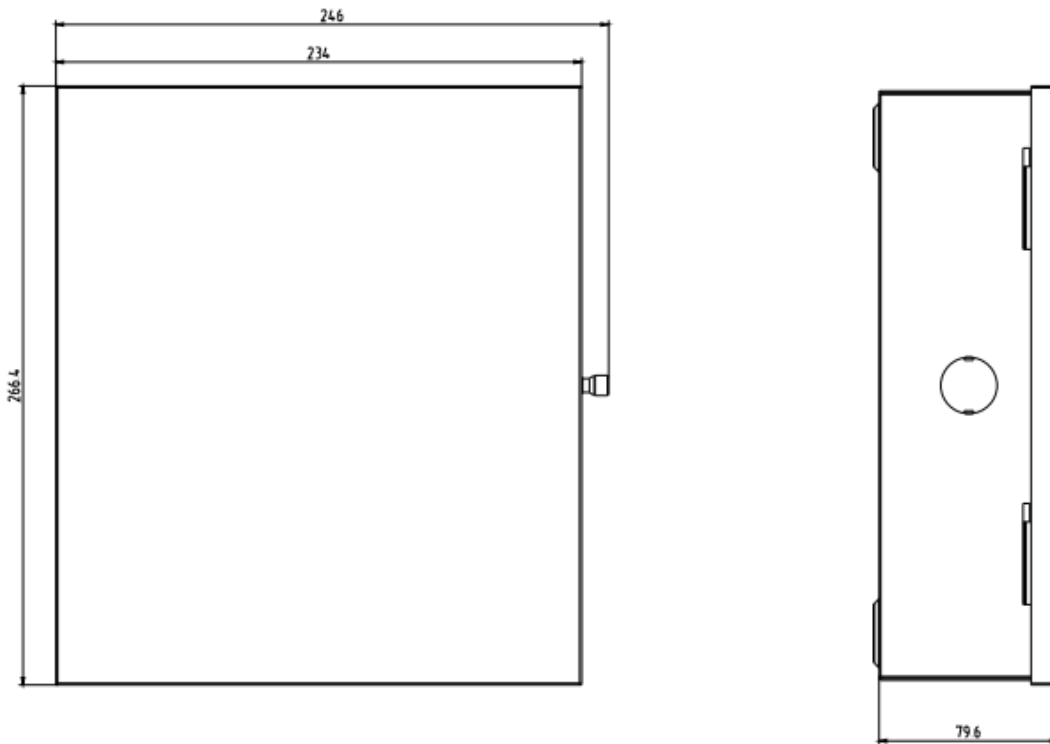

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761