

DH-HAC-HFW2120R-Z

1.3Megapixel 720P Water-proof HDCVI IR-Bullet Camera



Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR
- 2.7~12mm motorized lens
- Max. IR LEDs length 30m, Smart IR
- IP67, DC12V


DH-HAC-HFW2120R-Z

Technical Specifications


Model	DH-HAC-HFW2120RP-Z		DH-HAC-HFW2120RN-Z
Camera			
Image Sensor	1/3" 1.3Megapixel CMOS		
Effective Pixels	1305(H)×977(V)		
Electronic Shutter	1/3s~1/100,000s		
Video Frame Rate	25/50fps@720P	30/60fps@720P	
Synchronization	Internal		
Mini. Illumination	0.01Lux/F1.4, 0Lux IR on		
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)		
Camera Features			
Max. IR LEDs Length	30m, Smart IR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D/3D		
OSD Menu	Support		
Lens			
Focal Length	2.7~12mm		
Angle of View	H: 87.6° ~27.9°		
Lens Type	Motorized / Fixed Iris		
Mount Type	Φ14		
General			
Power Supply	DC12V±20%		
Power Consumption	Max 7.5W		
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)		
Transmission Distance	Over 800m via 75-3 coaxial cable		
Ingress Protection	IP67		
Dimensions(W×D×H)	213mm×80mm×72mm		
Weight	0.55kg		
Material	Metal		

DH-HAC-HFW2120R-Z

Dimensions (mm)

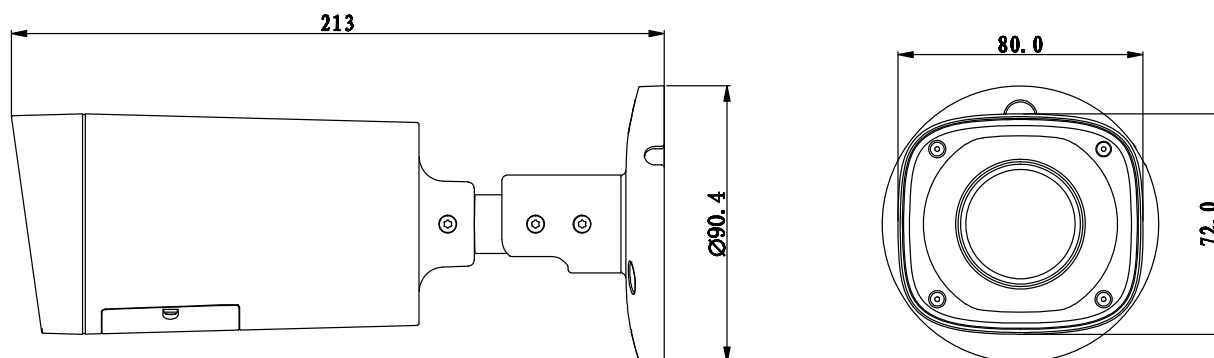

Accessories (optional)

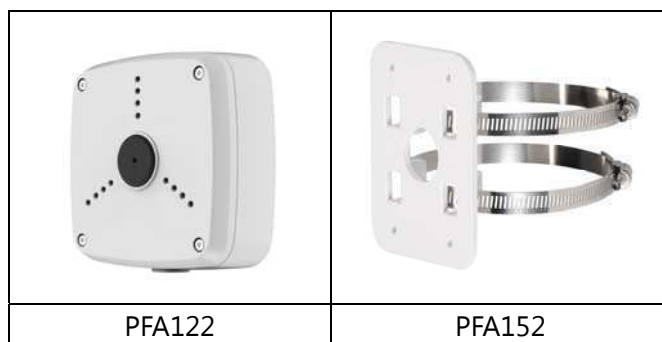

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.