

DH-HAC-HFW2221R-Z-IRE6-0722

2.1Megapixel 1080P Water-proof WDR HDCVI IR-Bullet Camera



Features

- 1/2.7" 2.1Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD dual-output
- OSD Menu, control over coaxial cable
- WDR(120dB), Day/Night(ICR), AWB, AGC, BLC, 3DNR
- 7~22mm motorized lens
- Max. IR LEDs length 60m, Smart IR
- IP67, DC12V


DH-HAC-HFW2221R-Z-IRE6-0722

Technical Specifications


Model	DH-HAC-HFW2221RP-Z-IRE6 -0722		DH-HAC-HFW2221RN-Z-IRE6 -0722
Camera			
Image Sensor	1/2.7" 2.1Megapixel CMOS		
Effective Pixels	1928(H)×1088(V)		
Electronic Shutter	1.3s~1/30,000s	1s~1/30,000s	
Video Frame Rate	25/30/50/60fps@720P; 25/30fps@1080P		
Synchronization	Internal		
Mini. Illumination	0.03Lux/F1.4, 0Lux IR on		
Video Output	1-channel BNC HDCVI high definition video output & CVBS standard definition video output		
Camera Features			
Max. IR LEDs Length	60m, Smart IR		
Day/Night	Auto(ICR) / Color / B/W		
Backlight Compensation	120dB True WDR		
Noise Reduction	2D/3D		
OSD Menu	Multi-language		
Lens			
Focal Length	7~22mm		
Angle of View	H: 41°~18°		
Lens Type	Motorized / Fixed Iris		
Mount Type	Φ14		
General			
Power Supply	DC12V±25%		
Power Consumption	Max 8.2W		
Working Environment	-30℃~+60℃ / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP67		
Dimensions(W×D×H)	213mm×80mm×72mm		
Weight	0.55kg		
Material	Metal		

DH-HAC-HFW2221R-Z-IRE6-0722

Dimensions (mm)

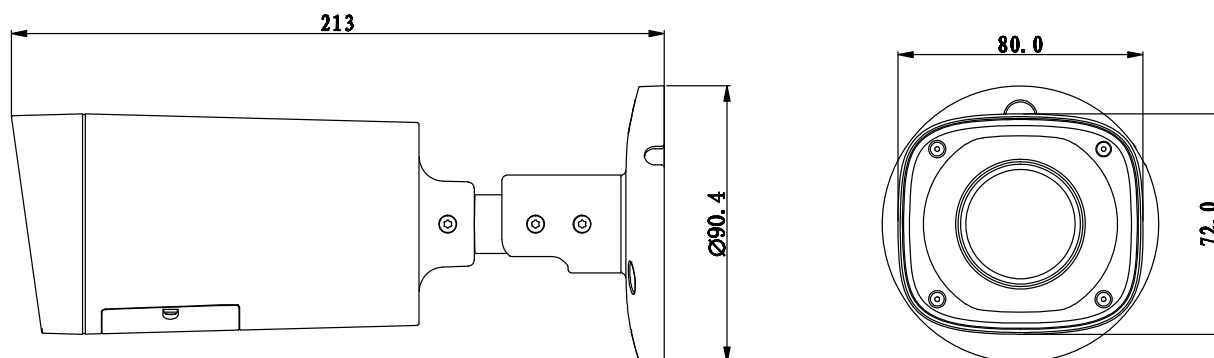

Accessories (optional)

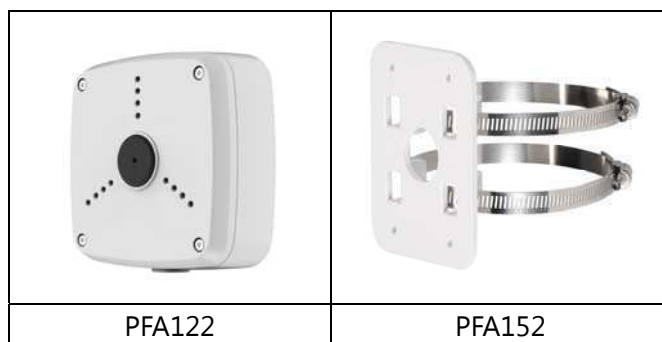

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.