

DH-IPC-HDBW4221F(-AS)

2MP Full HD WDR Network Vandal-proof IR Wedge Dome Camera



Features

- 1/2.7" 2Megapixel progressive scan CMOS
- Support H.264&MJPEG dual codec
- 25/30fps@1080P(1920×1080)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC,
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens (2.8mm, 6mm optional)
- 1/1 Alarm in/out, 1/1 audio in/out(only for -AS)
- Max. IR LEDs Length 20m
- Micro SD memory (only for -AS), IP67, IK10, PoE

DH-IPC-HDBW4221F(-AS)

Technical Specifications


Model		DH-IPC-HDBW4221F(-AS)	
Camera			
Image Sensor		1/2.7" 2Megapixel progressive scan CMOS	
Effective Pixels		1920(H) × 1080(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/100000s	
Min. Illumination		0.01lux/F2.0(color),0lux/F2.0 (IR on)	
S/N Ratio		More than 50dB	
Video Output		N/A	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR)/Color/B/W	
Backlight Compensation		BLC / HLC / WDR(120dB)	
White Balance		Auto/Sunny/Night/Outdoor/Customized	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.6mm (2.8mm,6mm optional)	
Max Aperture		F2.0(F2.0,F2.0)	
Focus Control		Manual	
Angle of View		H:93°(120°/63°)	
Lens Type		Fixed lens	
Mount Type		Board-in Type	
Video			
Compression		H.264/H.264H/H.264B/MJPEG	
Resolution		1080P(1920x1080)/1.3M(1280x960)/720P(1280×720)/D1(704×576 /704×480) /CIF(352×288/352×240)	
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
	Third Stream	720P(1-13/4fps)	
Bit Rate		H.264: 32K ~ 10Mbps	
Corridor Mode		Support	
Audio			
Compression		G.711a/ G.711u/ AAC(only for -AS)	
Interface		1/1 channel In/Out(only for -AS)	
Smart Function			
Smart detection		Tripwire	
		Intrusion	
		Abandoned/Missing	
		Scene Change	
		Audio detect	

DH-IPC-HDBW4221F(-AS)

	Face detect
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility	ONVIF,PSIA,CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD Max 128GB(only for -AS)
RS485	N/A
Alarm	1/1 channel In/Out(only for -AS)
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<5W
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Dimensions	Φ 106mm×50.3mm
Weight	0.35kg

DH-IPC-HDBW4221F(-AS)

Dimensions (mm)

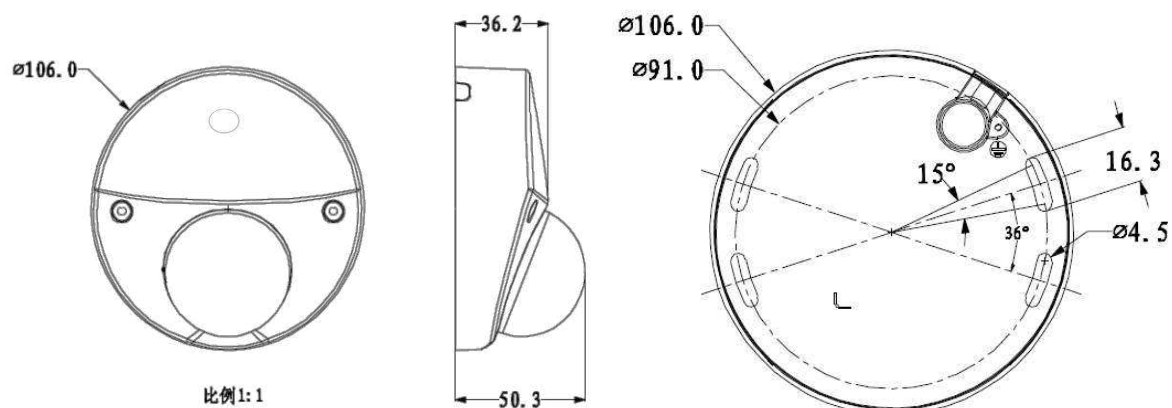

Accessory (optional)

PFB204W	PFA152	PFA139
		

Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2015Dahua Technology Co., Ltd.