

# DHL55-4K

## 55" UHD LCD Monitor



### Features :

- 4K ultra-HD resolution
- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works
- High fidelity digital processing, brilliant and vivid video
- Built-in 3D COMB filter and 3D Noise Reduction
- 8ms fast response time, no image ghosting
- 16.7M color, display every details of video
- Brightness smart detection, power-saving
- Using Tamper-proof metal housing, no radiation
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Abundant interfaces HDMI, DVI, VGA, BNC, USB, support video loop

### Technical Specification

#### Model

|       |          |
|-------|----------|
| Model | DHL55-4K |
|-------|----------|

#### System

|                                 |                                |
|---------------------------------|--------------------------------|
| Diagonal                        | 54.6"(16:9)                    |
| Resolution                      | 3840×2160 (UHD)                |
| Backlight                       | LED                            |
| Brightness/Luminance (Standard) | 500 cd/㎡                       |
| Contrast                        | 1100:1                         |
| Angle of view                   | 178°/178°(vertical/horizontal) |
| Response time                   | 8ms                            |

#### Signals

|        |          |                                                                       |
|--------|----------|-----------------------------------------------------------------------|
| Input  | standard | VGA(D-Sub)×1, CVBS(BNC)×1, DVI-D×1, HDMI×2, RS232×1, USB multimedia×1 |
|        | optional | Audio×1, RJ45×1, HDCVI×1, SDI×1, DP×1                                 |
| Output | Standard | Audio×1, RS232×1                                                      |
|        | optional | DP×1                                                                  |

#### General

|                        |     |
|------------------------|-----|
| Consumption (Standard) | 80W |
| Consumption (Standby)  | ≤1W |





|                     |                              |
|---------------------|------------------------------|
| Power Supply        | AC100~240V (+/-10%),50/60 Hz |
| Weight              | 26.5kg                       |
| Dimensions(no base) | 1263.1×743.9×51.9mm          |
| Work Environment    | Temperature:0°~50°           |
|                     | Humidity:20%~90%             |
| VESA                | 300×300mm                    |

#### Accessory

|          |                           |
|----------|---------------------------|
| Standard | VGA cable, power cable    |
| Optional | Pedestal, hanging bracket |

Dimensions(mm)

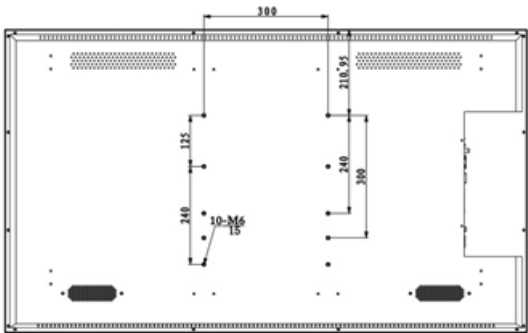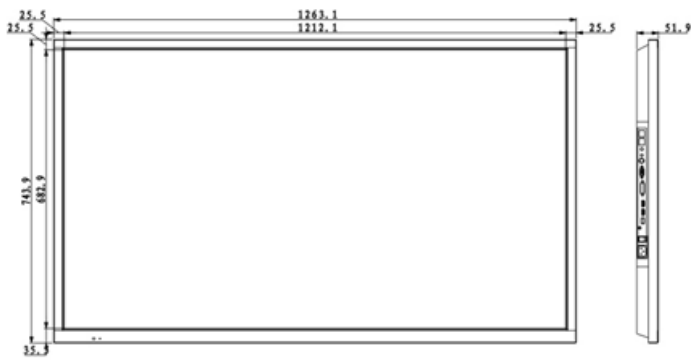

|                               |     |  |  |  |  |  |  |  |  |  |  |
|-------------------------------|-----|--|--|--|--|--|--|--|--|--|--|
| AC100 ~ 240V<br>1.2A 50/60 HZ | ON  |  |  |  |  |  |  |  |  |  |  |
| AC IN                         | OFF |  |  |  |  |  |  |  |  |  |  |
|                               |     |  |  |  |  |  |  |  |  |  |  |