

# VTH1550CHW-2

## 2-Wire IP Indoor Monitor



### Technical Specification

Model	VTH1550CHW-2
-------	--------------

#### System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

#### Video

Video Compression	H.264
-------------------	-------

#### Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

#### Display

LCD Screen	7" 800x480, Capacitive
------------	------------------------

#### Operation Mode

Input	Touch buttons
-------	---------------

#### Interface

Alarm In	6
Alarm Out	1
RS485	1

#### Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

#### General

Memory Slot	Micro SD, Max 32GB
-------------	--------------------


### Features

- 7" TFT Capacitive touch screen
- IPC surveillance(VTNC3000A needed)
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)




Installation	Surface
Power	DC 24V/ supply directly by VTNC3000A
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.5mm×136.5mm×22.0mm
Weight	0.8Kg

Dimensions

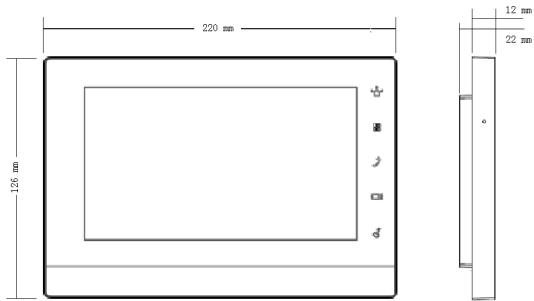

View Area

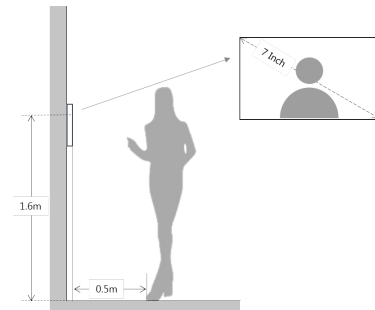

Application

