

# VTH5222CH

## 2-Wire IP Indoor Monitor



### Features

- 7" TFT Capacitive touch screen
- IPC surveillance(VTNS1006A-2 needed)
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



### Technical Specification

Model	VTH5222CH
-------	-----------

#### System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

#### Video

Video Compression	H.264
-------------------	-------

#### Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

#### Display

LCD Screen	7" 800x480, Capacitive
------------	------------------------

#### Operation Mode

Input	Touch buttons
-------	---------------

#### Interface

Alarm In	6
Alarm Out	1
RS485	1

#### Network


Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

#### General


Memory Slot	Micro SD, Max 32GB
-------------	--------------------

Installation	Surface
Power	Supply directly by VTNS1006A-2
Power Consumption	Standby ≤1.5W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	200.0mm×136.0mm×22.0mm
Weight	0.8Kg

## Dimensions

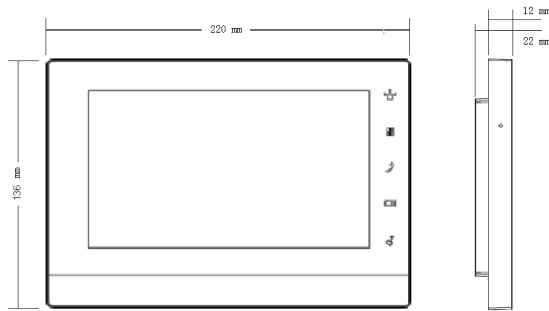

## View Area

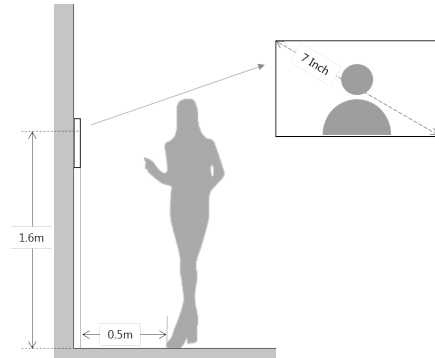

## Application

- Use two wires to transmit both signal and power.
- It is designed to replace existing analog system and make a full IP world

