

DHI-ASI7223Y-A-V3-T1

Face Recognition Terminal



- 7 Inch LCD display with resolution of 1024 × 600
- 2 MP CMOS, WDR
- Auto fill light reduces light pollution
- Can hold 50,000 users, 50,000 face images, 50,000 password, 50 administrators, and 100,000 records
- Support face and password unlock and unlock through their combinations
- With face detection box; the largest face among faces that appear at the same time is recognized first; the maximum face size can be configured on the web
- Face-camera distance: 0.3 m–2.0 m; human height: 0.9 m–2.4 m (lens-ground distance: 1.4 m)
- With face recognition algorithm, the access controller can recognize more than 360 positions on human face
- Face recognition speed: 0.35 s per face
- Support liveness detection
- Accurate recognition in backlight and front light
- Various unlock status display modes protect user privacy
- Support enabling/disabling the temperature monitoring mode; temperature monitoring range is 30°C to 45°C (86°F to 113°F); temperature monitoring distance range is 0.3 m–1.8 m; temperature monitoring error is ≤0.5°C; report temperature anomaly alarm
- Support mask detection, report alarm of abnormal events without wearing a mask
- Support duress alarm and tamper alarm
- Support general users, patrol users, VIP users, guest users, and special users



Technical Specification

System

| | |
|-------------------|--------------------------------|
| Main Processor | Embedded Processor |
| Internet Protocol | IPv4, RTSP, RTP, TCP, UDP, P2P |
| OSDP Protocol | Yes |
| Interoperability | ONVIF; CGI |
| SDK and API | Support SDK |

Basic

| | |
|--------------------|---|
| Display | 7-inch display |
| Screen Type | Capacitive Screen |
| Resolution | 600 (H) × 1024 (V) |
| Camera | 1/2.8" 2MP CMOS high definition WDR dual camera |
| WDR | 120 dB |
| Light Compensation | Auto white light Auto IR light |
| Status Indicator | 1 indicator light. Red: Error; Green: Normal; Blue: Working |
| Voice Prompt | Yes |
| Housing Material | PC+ABS |

Function

| | |
|------------------------|---|
| Unlock Mode | Remote/Password/Face unlock and unlock through their combinations; Face unlock under temperature monitoring mode |
| Period List | 128 |
| Holiday Period | 128 |
| Remote Verification | Yes |
| Peripheral Card Reader | 1 RS-485, 1 Wiegand |
| Real-Time Surveillance | Yes |


| | |
|---------------------------------|--|
| Web Configuration | Yes |
| Performance | |
| Face Recognition Range | Face-camera distance: 0.3 m–2.0 m Human height: 0.9 m–2.4 m |
| Face Verification Accuracy | 99.5% |
| Face Recognition Time | 0.35 s |
| Temperature Monitoring Range | 30°C–45°C (86°F–113°F) |
| Temperature Monitoring Error | ≤ 0.5°C |
| Temperature Monitoring Distance | 0.3 m–1.8 m |
| Temperature Monitoring Height | 135 cm–185 cm (when temperature monitoring distance is 0.5 m) 120 cm–210 cm (when temperature monitoring distance is 1.2 m) |
| Capacity | |
| User Capacity | 50,000 |
| Face Image Capacity | 50,000 |
| Password Capacity | 50,000 |
| Record Capacity | 100,000 records |
| Port | |
| RS-485 | 1 |
| Wiegand | 1 (input or output) |
| USB | 1 × USB2.0 port |
| Network | 1 × 100 Mbps network port |
| Alarm Input | 1 (Switch quantity) |
| Alarm Output | 1 (Relay) |
| Alarm Linkage | Yes |
| Exit Button | 2 |
| Lock Control | 2 |
| Alarm | |
| Anti-Passback | Yes |
| Tamper | Yes |
| Duress | Yes |
| General | |
| Power Supply | Provided |
| Power Supply Mode | 12V 1A DC |
| Power Consumption | ≤ 12W |
| Product Dimensions | 470.0 mm × 130.1 mm × 106.6 mm (18.50" × 5.12" × 4.20") |
| Packaging Dimensions | "Controller packaging: 593 mm × 258 mm × 130 mm (23.35" × 10.16" × 5.12") Protective case: 672 mm × 615 mm × 291 mm (26.46" × 24.21" × 11.46")" |

| | |
|---------------------|--|
| Working Temperature | "Temperature monitoring mode disabled: –10°C to 55°C (14°F to +131°F) Temperature monitoring mode enabled: 15°C to 30°C (59°F to 86°F)" |
| Working Humidity | 0%RH–90%RH (non-condensing) |
| Working Environment | Indoor |
| Gross Weight | 2.9 kg (6.39 lb) |
| Installation | Desktop |
| Certifications | CE/FCC |

Ordering Information

| Type | Model | Description |
|--|----------------------|---|
| Face Recognition Terminal (indoor; temperature monitoring) | DHI-ASI7223Y-A-V3-T1 | 7-inch Face Recognition Terminal (indoor; temperature monitoring) |
| Face Recognition Terminal (indoor; temperature monitoring) | ASI7223Y-A-V3-T1 | 7-inch Face Recognition Terminal (indoor; temperature monitoring) |

Dimensions (mm[inch])

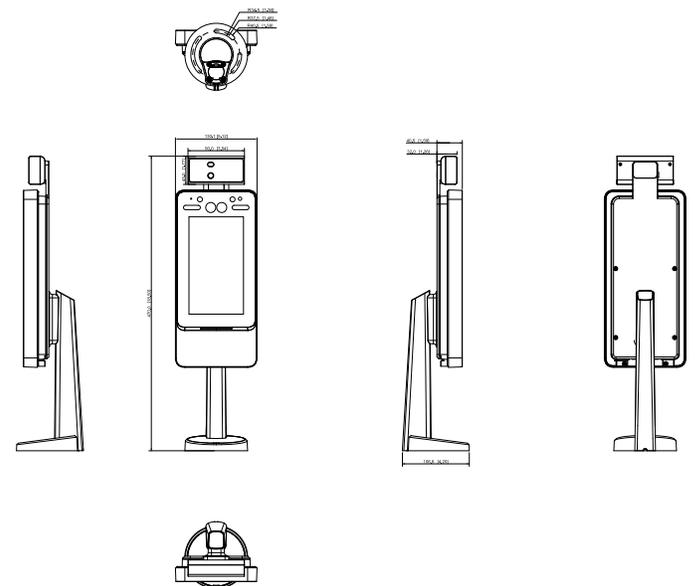

Application

