

DH-VTKB-VTO5110B-VTH1500B

7 Inch Analogue Kit



VTO5110B

VTH1500B

Features

- 7" color TFT-LCD display
- Cat 5e system, easy installation
- Support monitoring, video talk, unlock function
- Compatible to up to 8 security sensors (burglar, fire, gas leakage, etc)
- Color CMOS night vision camera
- Support IC card opening

Specifications

Model		VTO5110B
Video	Туре	color
	Resolution	600 lines
	Night vision	Support
Audio	Audio Input	1-ch microphone input
	Audio Output	1-ch loudspeaker output
	Bidirectional	1-ch bidirectional talk, two way
	Talk	
Operating	input	One Touch button with background light
modes	credit card	Built-in Card read
Alarm	tamper	Support
General	Power	DC 24V
	Power	Standby $\leq 1W$, work $\leq 4W$
	Consumption	
	work	Temperature: -20°C∼+60°C
	environment	
	Dimensions	154.2mm*114.2mm*43.0mm (L*W*T)



DH-VTKB-VTO5110B-VTH1500B

Weight


0.5kg

Model		VTH1500B
System	Main Processor	NEC MCU
	Operation	
	Interface	Simple OSD message
	Input Device	Mechanical keys, 5
Video	Video Input	1-ch CVBS analog video
	Video Display	7" color LCD, resolution: 800x480
	Monitoring	Support monitoring with monitor button
	Audio Input	1-ch microphone input (Omni-directional electrets)
Audio	Audio Output	1-ch loudspeaker output
	Bidirectional Talk	1-ch bidirectional talk, two way
	Net Control	Monitor & Unlock
Network		Call management center for emergency
Function		RS485 bus
		Remotely upgrade
Interface	Net Interface	RJ45 (non-Ethernet) plug connected with distributor, including power
		supply, AV and control signal
	RS485	Bus control and software upgrading
	DC Power	24V
System Upgrading		Remote network upgrading
	Power	24V / 0.3A
	Power	max 6W
	Consumption	
	Temperature	-5°C-+55°C
General	Humidity	20%-90%
	Dimensions	221.2mm*154.3mm*24.2mm (L*W*T)
	Weight	0.75 KG
	Installation Method	Installed on 86 box sheet metal bracket



DH-VTKB-VTO5110B-VTH1500B

Application

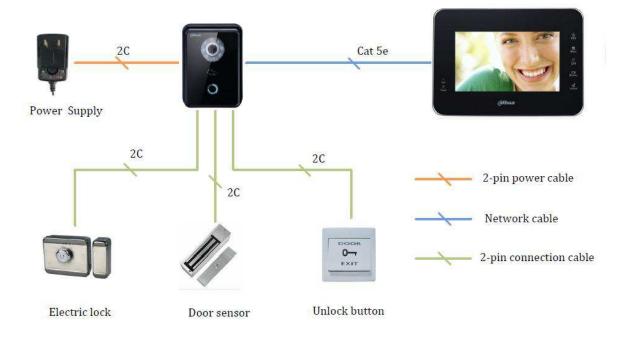

Dahua Technology Co., Ltd. 1199BinAn Road, Binjiang District, Hangzhou, China Tel: +86-571-87688883 Fax: +86-571-87688815 Email:overseas@dahuatech.com www.dahuatech.com

*Design and specifications are subject to change without notice.